


DUALLY






Specifications

- 50,000+ hour life span
- 9-36V
- Reverse polarity protection
- Available in spot or flood
- IP68 certified
- Goretex breather
- Unbreakable polycarbonate lens
- A360 high purity aluminum cast housing
- Durable UV 3800 polyester powdercoat
- Sealed deutsch connector
- Over/Under voltage protection
- Operating temp -40~+145 deg F
- MIL810-STDG vibration certified
- ASTMB117 salt/fog certified
- ROHS compliant
- Electrically protected against RFI/EMC interference
- Updated hybrid patented optic system.
- Integrated thermal management system

Size Specifications

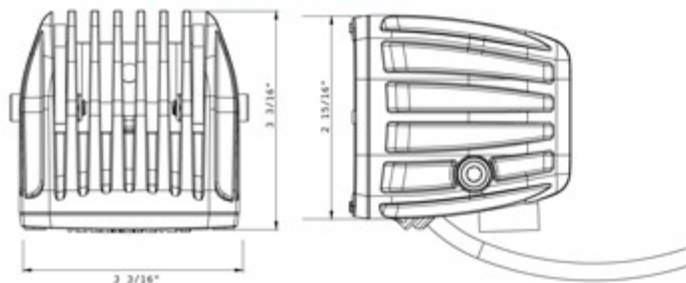

Lux Specifications

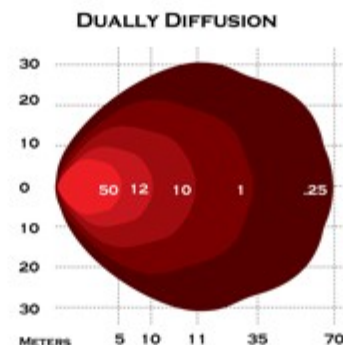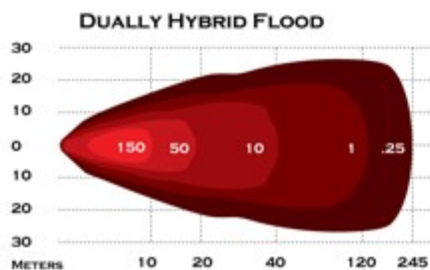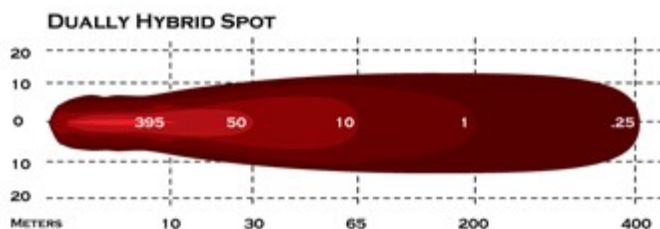

Specifications (PE = Combo)

Model	Alt ID	Weight (lbs)	Watts	AMP Draw	LED's	Raw Lumens*	Lux @ 10m	Beam Distance (m)**	Peak Beam Intensity (cd)**
DUALLYFLDW	20111	1.25	15	1	4	1300	150	244.9	15000
DUALLYSPW	20121	1.25	15	1	4	1300	395	397.5	39500
20151	20151	1.25	15	1	4	1300	12	69.3	1200

Available in Marine Series
Page 48



Available with Diffused
Lens



Light Kit Includes

- Plug and play harness with switch
- Mounting brackets
- Mounting hardware

Alt ID	Description
20111	White - Flood - Single
20121	White - Spot - Single
20211	White - Flood - Set of 2
20221	White - Spot - Set of 2
20112	Amber - Flood - Single
20122	Amber - Spot - Single
20212	Amber - Flood - Set of 2
20222	Amber - Spot - Set of 2
20151	White 60 degree Diffused-Single
20251	White 60 degree Diffused-Set of 2

* Based on LED manufacturer Specifications
** Tested using ANSI/NEMA FL Standards

